

RYL-II 6 UAV

5



S

RYL-II 6 UAV 5G RTK


RTK centimeter-level positioning

RTK high-precision positioning, 4G/5G network communication, remote network control



80min long battery life

With high-density lithium battery, the no-load battery life can reach 80min.

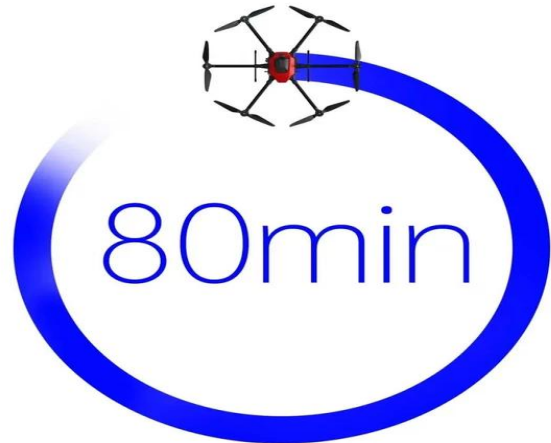

High strength and light weight



Carbon fiber
Integrated fuselage



Moderate
rainproof



The scene is richer

At the same time, it is equipped with 5 mounts to adapt to rich application scenarios.



Quick disassembly and exchange



Plug-in arm design

Achieve quick disassembly and assembly



Unified standardized interface

Implement mount interchange



□□□□□□□□



JYB-Z40



JYB-T2



JYB-ZT40



JSY-S1



HTL-P1




HTL-P0 Pro



YLJ



DHX-L50



PLH-FE3

T □□□□□□□□:

重量: 6kg

最大容量: 1,600L

口径 560mm

口径 6.9kg

重量: 23.9kg

重量: 10kg

重量: 0~15m/

重量: 12.9kg

重量: 80

重量: 0~4m/

重量: 5000

重量: 20km

重量: 12m/6

重量: -20°C -65°C

重量: 10% ~ 90%

重量: IP54

重量: 100A/m

重量:

重量: