

XXF-X85 无人机 UAV

XXXXXXXXXXXXXXXXXXXXXXXXXXXX



B 参数 表 说明:


XXF 无人机系列中的 X X F-X85 无人机系列是专为专业级应用而设计的。它配备了6S电池系统，最大续航时间为45分钟。MMC模块支持最大2.5kg的有效载荷。该无人机还具备先进的飞行控制系统和多种安全功能。

该无人机支持RTK高精度定位系统，GPS定位精度可达厘米级。它还配备了多种传感器，包括高度计、气压计和磁力计，以确保飞行的稳定性和安全性。



P 4 F 4:

- 4K/60fps video recording
- 4K/120fps video recording
- 4K/240fps video recording
- HD video recording 5km range;
- 4K/60fps video recording

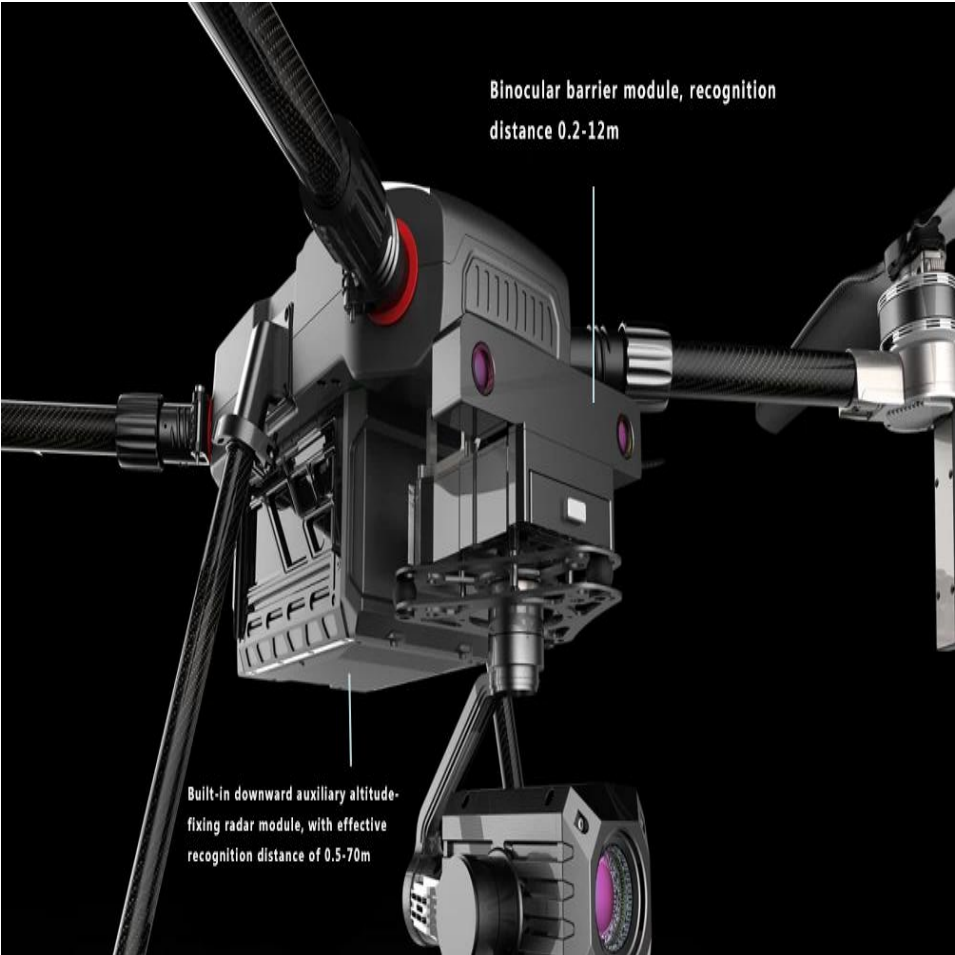

Binocular barrier module, recognition distance 0.2-12m

Built-in downward auxiliary altitude-fixing radar module, with effective recognition distance of 0.5-70m

Technical specifications:

Overall length	850mm
Overall width	500mm
Weight	3.8kg
Max. payload	1400g
Motor	870×464×275mm
Propeller	5-blade
Propeller pitch	21° (pitch range 22°)
Max. speed	9km/h
Max. climb rate	2.4km/h
Max. descent rate	0~20m/s
Max. altitude	6.6km
Max. range	1000m
Max. range (with RTK)	42km
Max. range (with RTK and 5G)	32km
Max. range (with RTK and 5G and 4G)	GPS/RTK
Max. range (with RTK and 5G and 4G and 3G)	5000m
Max. range (with RTK and 5G and 4G and 3G and 2G)	7km (with 5G)
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G)	7km (with 5G)
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G and 0G)	12m/s (with 6G)
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G and 0G and -1)	-20°C~45°C
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G and 0G and -1 and -2)	10%~90% humidity
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G and 0G and -1 and -2 and -3)	IP54
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G and 0G and -1 and -2 and -3 and -4)	100A/m (with 5G)
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G and 0G and -1 and -2 and -3 and -4 and -5)	1000m (with 5G)
Max. range (with RTK and 5G and 4G and 3G and 2G and 1G and 0G and -1 and -2 and -3 and -4 and -5 and -6)	1000m (with 5G)

Model M specifications:

