

RTK System V30Plus GNSS RTK



RTK System V30Plus is a professional GNSS RTK system. It features a WebUI, WiFi, Bluetooth, and 4G connectivity. It is designed for professional site research and software development. It supports 10 different V30Plus models. It is compatible with Linux and 8G storage.



V30 PLUS

GNSS RTK SYSTEM

With its built-in multi-constellation GNSS engine, smaller dimension, and industrial-grade compact design, V30Plus provides a flexible GNSS work solution. It also integrates with the WebUI, WIFI, Bluetooth and 4G module to make data management and transmission more convenient and faster. Accompanied by Hi-Target professional field surveying software and its up-to-10-hours working time, V30Plus meets users' needs of efficient and convenient surveying experience.



83.5mm / 164mm / 1200g
HEIGHT / DIAMETER / WEIGHT



Multi-Constellation GNSS Engine

- Tracking full-constellation satellites to achieve accurate and stable positioning accuracy.
- Provides reliable results in harsh environments with its unique GNSS positioning algorithm.



Tilt Survey and Electronic Bubble

- The optimized tilt survey algorithm and procedure electronic bubble can achieve corner points measurement by shaking the receiver.



Hi-Fix Technology


- Reduce downtime in the field with continuous RTK coverage during correction outages from an RTK base station or VRS network.

Full-frequency air antenna

- Stable and better noise resistance full-wave GNSS antenna.
- Supports a wide range of satellite tracking signals.
- Reduce the multipath effect influence.


Smart application

- Built-in Linux system and 8G storage.
- Intelligent management of the static data.
- Intelligent voice assistant to guide field operations.
- Standard Rinex data and Hi-Target raw data recorded simultaneously.



Data communication

- Compatible with other vendors' communication protocols.
- Long transmission distance, and good electromagnetic compatibility.
- Perfectly compatible with a variety of CORS systems.

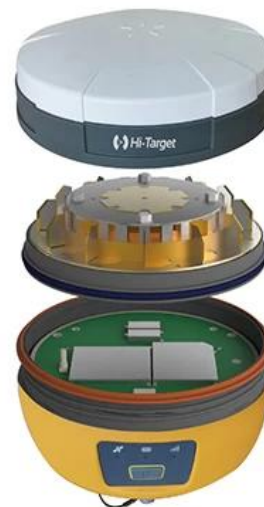

iHand30

Professional Field Controller

The iHand30 is a rugged field controller that is designed for data collection and GNSS device control. Based on the Android operating system, it is compatible with Hi-Target professional software and third-party Android software. Combining the physical keyboard with a touchscreen, it can boost efficient fieldwork and provide reliable solutions for users.

KEY FEATURES



Ergonomically designed, lighter and easy to hold.



Industrial-grade protection that can withstand tough environments.



Convenient wireless data transmission via Bluetooth, Wi-Fi and 4G.



Quick charge, with a large capacity lithium battery to ensure a whole day work.

Hardware Configuration	OS: Android 10 Processor: MTK6762; CPU: 8 core; 4*A53 2.0GHz, 4*A53 1.5GHz; 2GBRAM+16GB ROM Display: 3.7", 640 x 480, sunlight readable Camera: 8MP, tag available Sensors: G-sensor, E-compass, barometer, light-field sensor, gyro
Communication	Cellular mode: Dual SIM card, dual stand-by Cellular network: 4G TDD-LTE, FDD-LTE, WCDMA, GPRS Wi-Fi: IEEE 802.11b/g/n, 2.4GHz Bluetooth: V2.0/4.0 USB: Type-C, supports OTG NFC
Physical	Weight: 440g (within battery) Size: 208mm*83mm*24mm Temperature: -20°C ~ +60°C(Operating); -30°C ~ +70°C(Storage) Free-fall: 1.2m Water/Dustproof: IP67
GNSS Features	Channels: 20 GNSS: GPS, GLONASS, AGPS, Update rate: 1Hz
Power Supply	Battery: Removable 3.7V lithium battery, 5200mAh Duration: 15 hours Quick charge within 3 hours

iHand30

Professional Field Controller

The iHand30 is a rugged field controller that is designed for data collection and GNSS device control. Based on the Android operating system, it is compatible with Hi-Target professional software and third-party Android software. Combining the physical keyboard with a touchscreen, it can boost efficient fieldwork and provide reliable solutions for users.

KEY FEATURES



Ergonomically designed, lighter and easy to hold.



Industrial-grade protection that can withstand tough environments.



Convenient wireless data transmission via Bluetooth, Wi-Fi and 4G.




Quick charge, with a large capacity lithium battery to ensure a whole day work.

Hardware Configuration	OS: Android 10 Processor: MTK6762; CPU: 8 core; 4*A53 2.0GHz, 4*A53 1.5GHz; 2GBRAM+16GB ROM Display: 3.7", 640 x 480, sunlight readable Camera: 8MP, tag available Sensors: G-sensor, E-compass, barometer, light-field sensor, gyro
Communication	Cellular mode: Dual SIM card, dual standby Cellular network: 4G TDD-LTE, FDD-LTE, WCDMA, GPRS Wi-Fi: IEEE 802.11b/g/n, 2.4GHz Bluetooth: V2.0/4.0 USB: Type-C, supports OTG NFC
Physical	Weight: 440g (within battery) Size: 208mm*83mm*24mm Temperature: -20°C ~ +60°C(Operating); -30°C ~ +70°C(Storage) Free-fall: 1.2m Water/Dustproof: IP67
GNSS Features	Channels: 20 GNSS: GPS, GLONASS, AGPS, Update rate: 1Hz
Power Supply	Battery: Removable 3.7V lithium battery, 5200mAh Duration: 15 hours Quick charge within 3 hours

Hi-Survey Road

Survey Data Collection Software

Hi-Survey Road is an Android software that is designed for all types of land survey and road engineering projects in the field. It is compatible with Hi-Target professional controllers, Android phones, tablets and other third-party Android devices. It is a sleek and easy-to-use software that supports the operating of big data with built-in tools. With customized industrial application solutions, more possibilities are created for users.



KEY FEATURES



High accuracy and good reliability with various algorithms even in tough environments.
Supporting tilt survey, quasi-dynamic technology, electronic bubble, detail survey, time mode static survey, etc...



Integrated professional measurement functions for engineering application.
Providing road functions, DTM surface operations, 2D/3D projects points selection, DXF and DWG format, Google map, QGC map service of WMS, WMTS, and third-party rangefinders, etc...



Strong interaction function to empower every surveyor.
AR stakeout, QR code scanning, COGO, FTP transmission, multi-format support, etc...