


Operation mode

Satisfy multiple operation modes such as straight, curved, diagonal rake, and multi machine collaboration, adapt to 90% of operation scenarios, effectively improve operation efficiency, and reduce labor intensity.

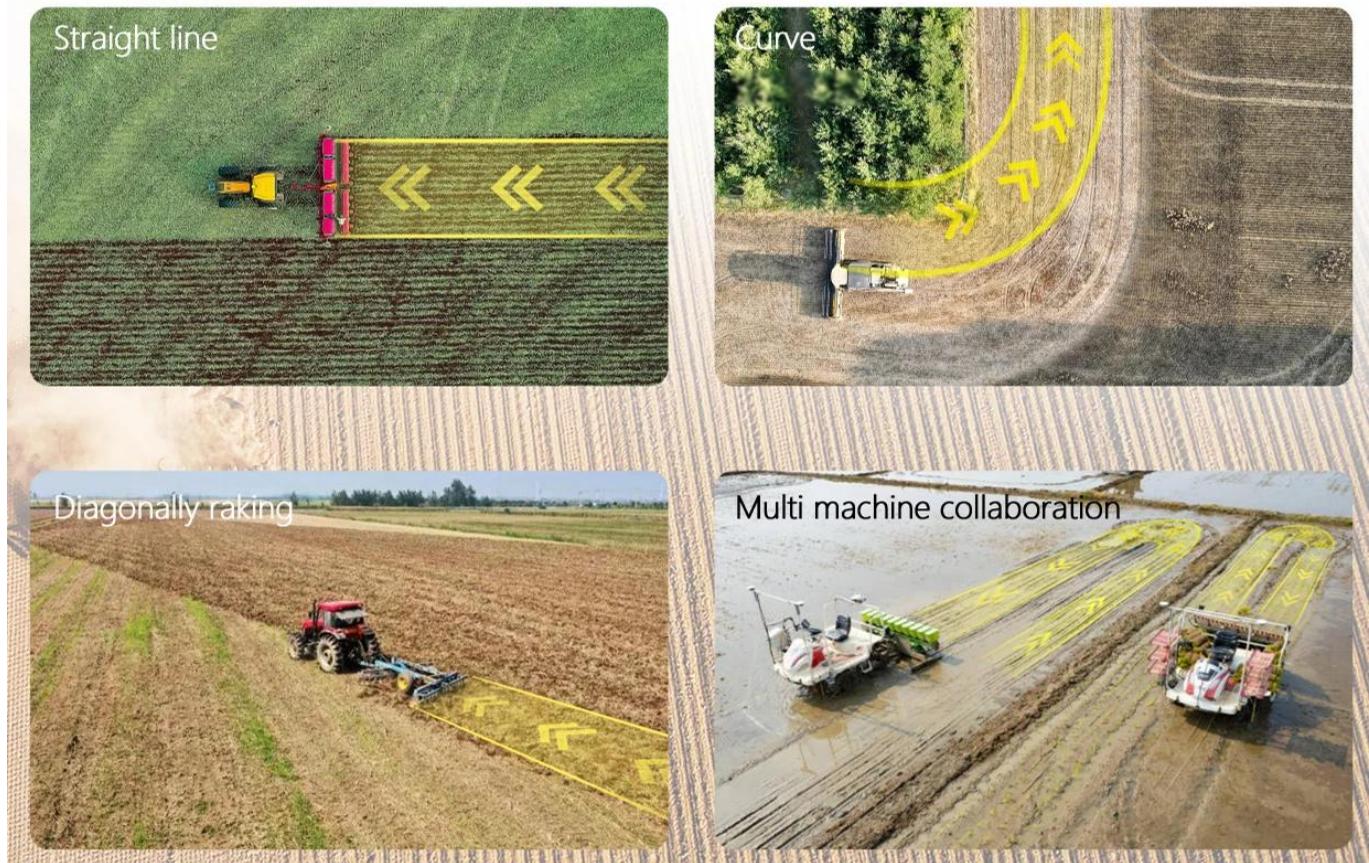

Adapted to various agricultural machinery

Suitable for all kinds of brands of agricultural machinery, can be adapted to tractors, rice transplanter, plant protection machine, harvester and other agricultural machinery, suitable for all outdoor operations.

Parameters of the model

Electric Steering Wheel	
Weight	5500g
Size	216x87x76mm
Working Voltage	12~24V
MAX Current	10A
Rated Torque	8N·m
Communication Mode	RS232/CAN

Control Terminal	
Weight	1190±10g
Size	10.1"
Working Voltage	9~36V
Operating System	Android 10.0
Network Module	4G/3G/2G
IP Rating	IP65
Brightness	≥450 cd/□

GNSS Receiver	
weight	1000g
Size	160x160x65mm
RTK positioning accuracy	0.8cm
Network Module	4G
Working Voltage	9~36V
Working Current	20mA
IP Rating	IP67